
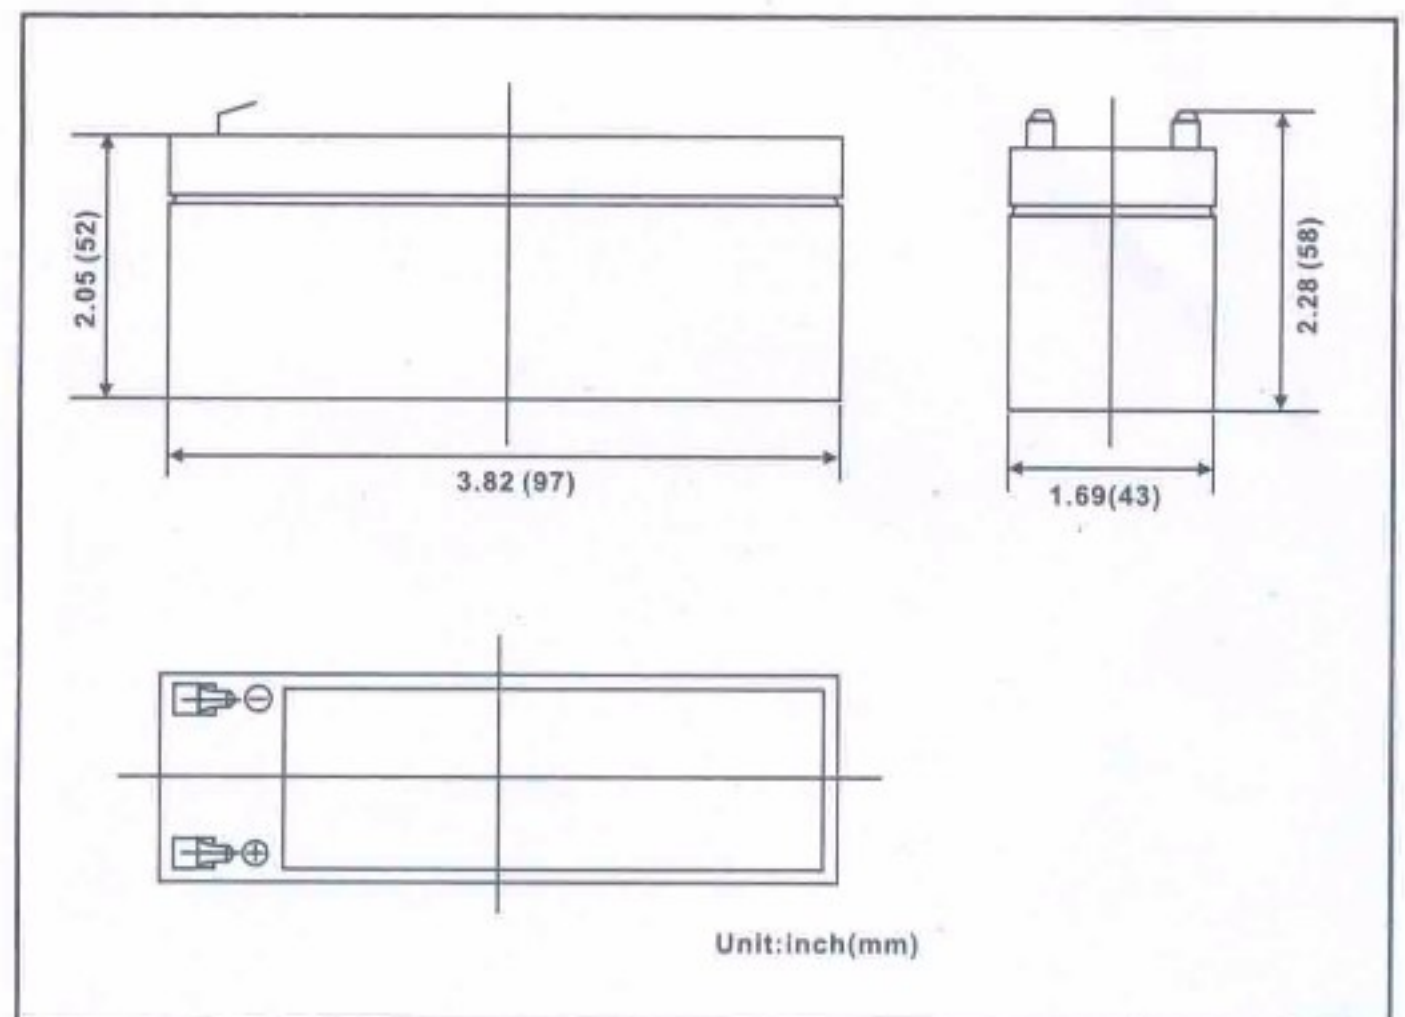



12M1.2

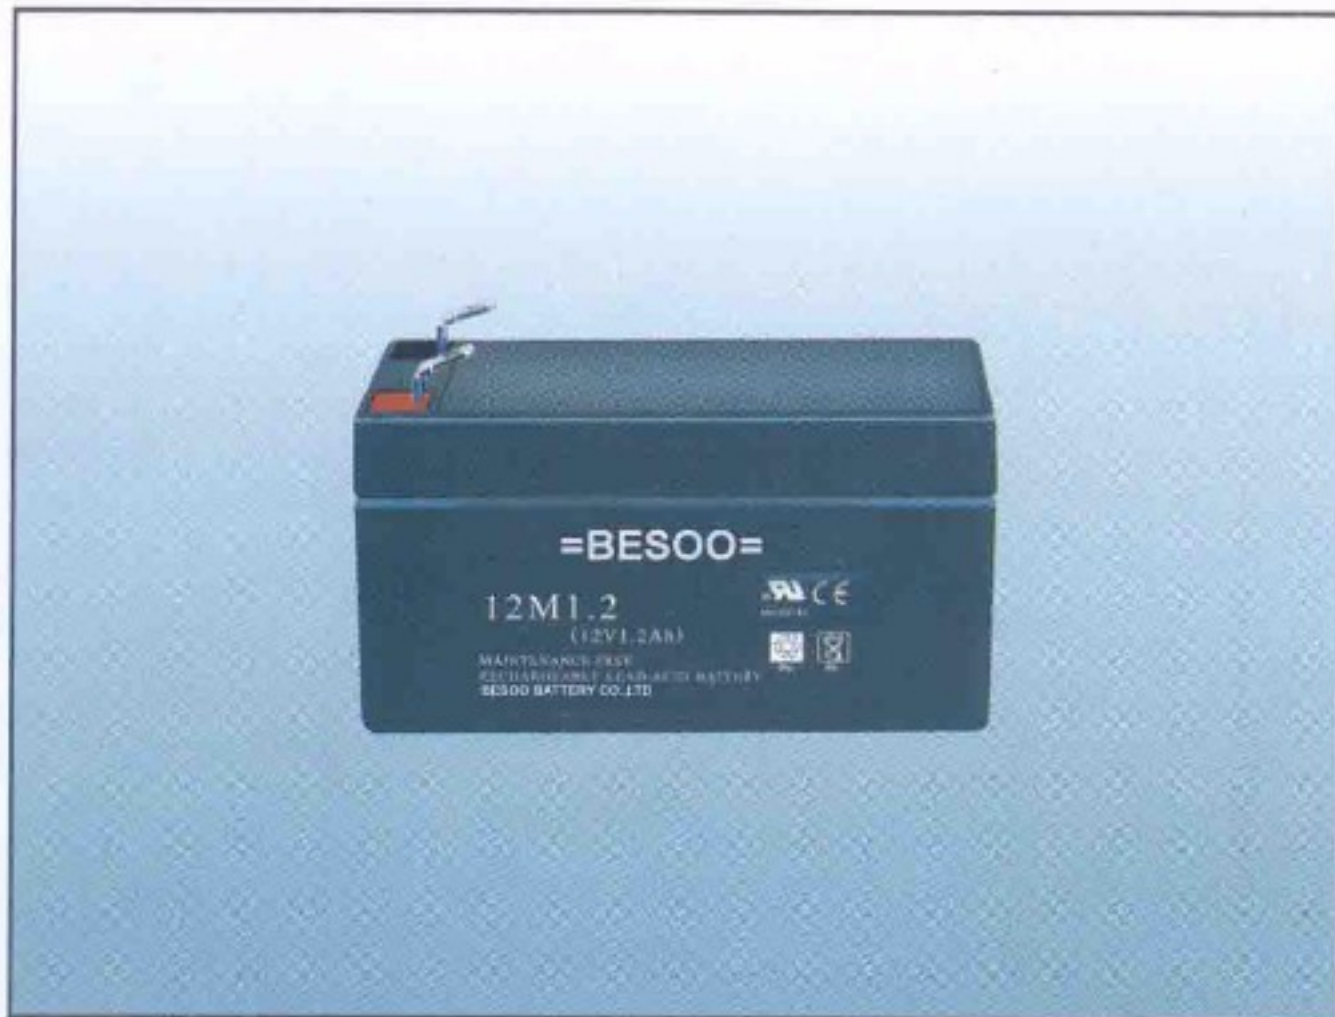

SPECIFICATIONS

Nominal Voltage		12V			
Nominal Capacity		1.2Ah			
Dimensions	Length	3.82 inches(97mm)		Weight	Approx 1.33lbs (600g)
	Width	1.69 inches(43mm)			
	Height	2.05 inches(52mm)		Terminals	F1(standard)
	Total Height	2.28 inches(58mm)			
Capacity 77°F(25°C)	20 hour rate(60mA)	1.2 Ah	Constant Voltage Charge	Cycle	Initial Charging Current less than 0.36A Voltage 14.5-14.9V at 77°F(25°C)Temp.coefficient -30mv/°C
	10 hour rate(110mA)	1.1 Ah			
	5 hour rate(190mA)	0.9 Ah			
	1 hour rate(820mA)	0.8 Ah			
	15 minute rate(2.16A)	0.5 Ah			
Capacity affected by Temperature	104°F(40°C)	102%	Standby	Initial Charging Current less than 0.36A Voltage 13.50-13.80V at 77°F(25°C)Temp.coefficient -20mv/°C	
	77°F(25°C)	100%			
	32°F(0°C)	85%			
	5°F(-15°C)	65%			
Internal Resistance	Full charged battery 77°F(25°C) < 68mΩ				

Discharge Characteristics @ 77°F(25°C)

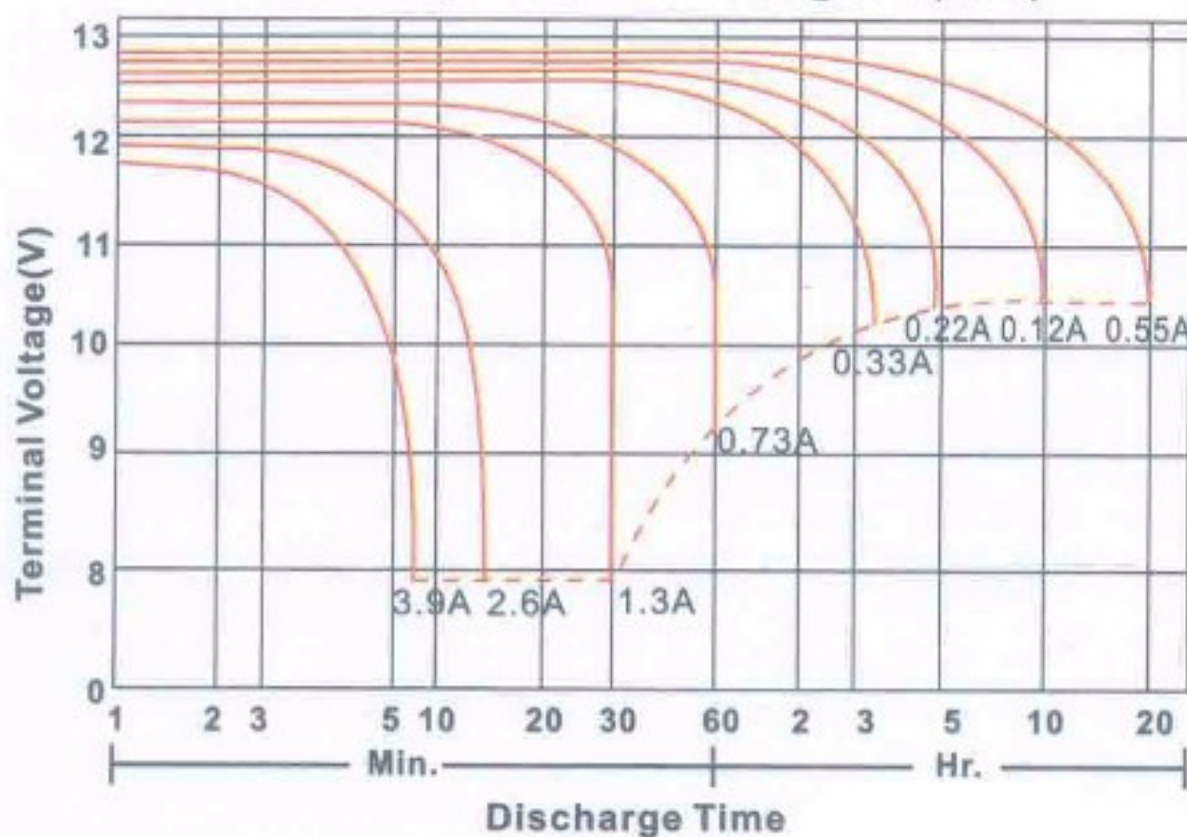

Discharge Time Vs. Discharge current

