



# 12M200

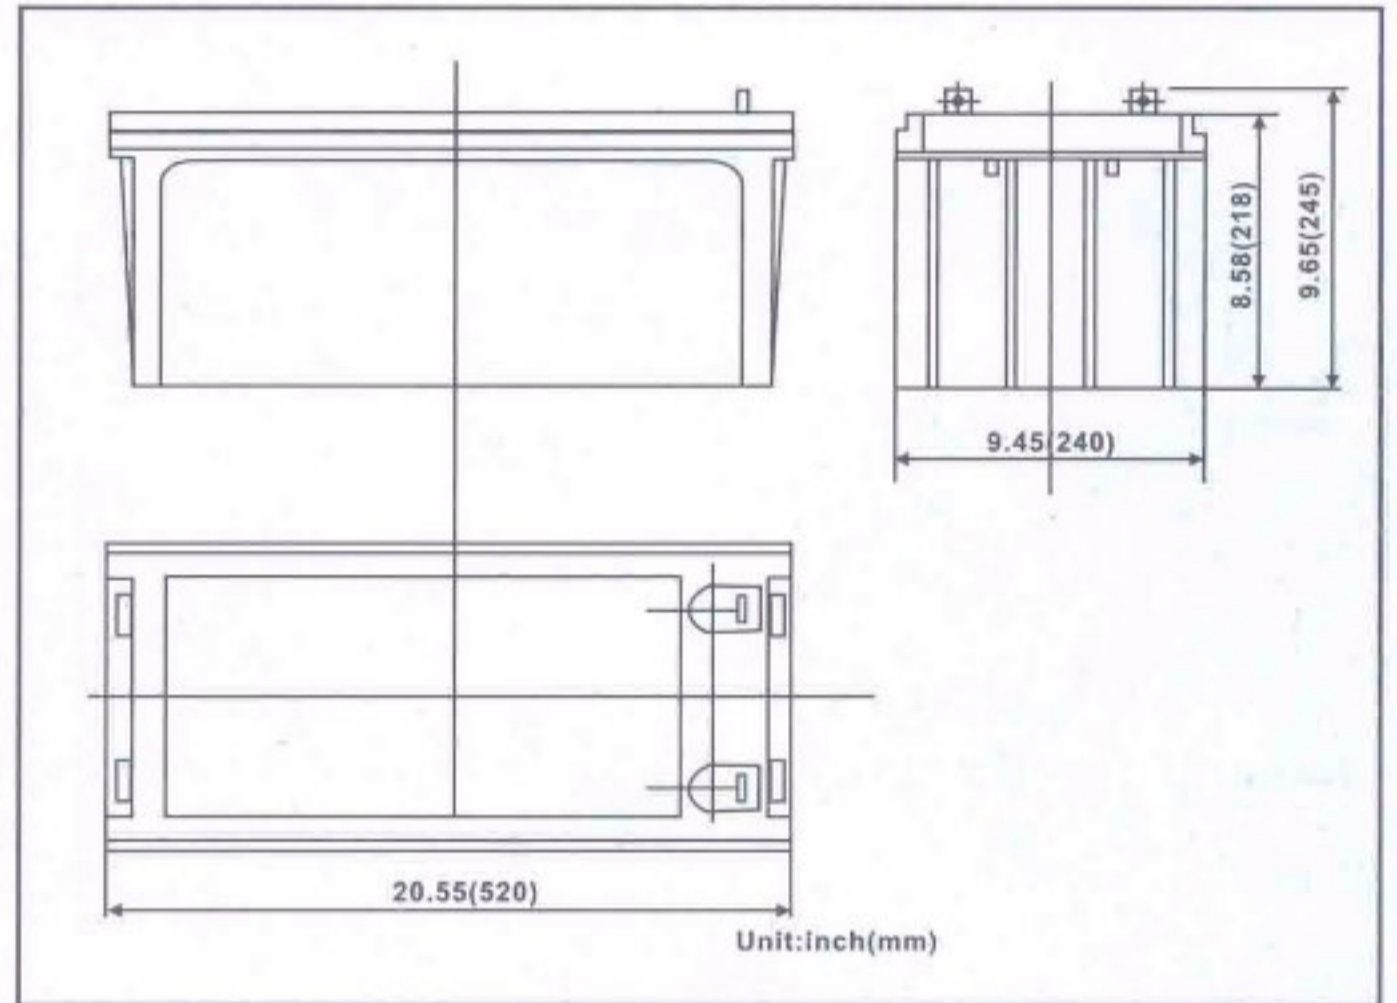

## SPECIFICATIONS

<b>Nominal Voltage</b>		<b>12V</b>			
<b>Nominal Capacity</b>		<b>200Ah</b>			
<b>Dimensions</b>	<b>Length</b>	20.55 inches(520mm)		<b>Weight</b>	Approx <b>143lbs</b> (65000g)
	<b>Width</b>	9.45 inches(240mm)			
	<b>Height</b>	8.58 inches(218mm)		<b>Terminals</b>	<b>F9(standard)</b>
	<b>Total Height</b>	9.65 inches(245mm)			
<b>Capacity</b> 77°F(25°C)	20 hour rate(10.0A)	200 Ah	<b>Constant Voltage Charge</b>	<b>Cycle</b>	Initial Charging Current less than 60A Voltage 14.5-14.9V at 77°F(25°C)Temp.coefficient -30mv/°C
	10 hour rate(19.0A)	190 Ah			
	5 hour rate(32.1A)	160.5 Ah			
	1 hour rate(124A)	124 Ah			
	15 minute rate(340A)	85 Ah			
<b>Capacity affected by Temperature</b>	104°F(40°C)	102%	<b>Standby</b>	Initial Charging Current less than 60A Voltage 13.50-13.80V at 77°F(25°C)Temp.coefficient -20mv/°C	
	77°F(25°C)	100%			
	32°F(0°C)	85%			
	5°F(-15°C)	65%			
<b>Internal Resistance</b>	Full charged battery 77°F(25°C) < 3.5mΩ				

Discharge Characteristics @ 77°F(25°C)

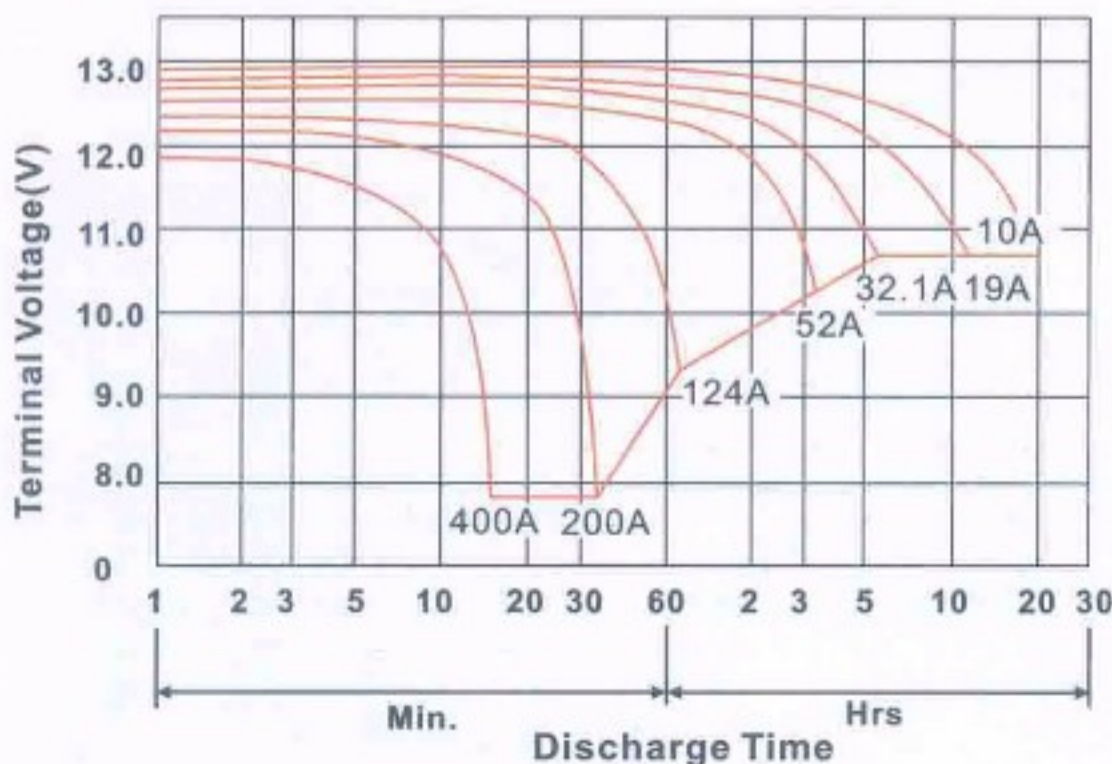

Discharge time Vs. Discharge current @ 77°F(25°C)

