
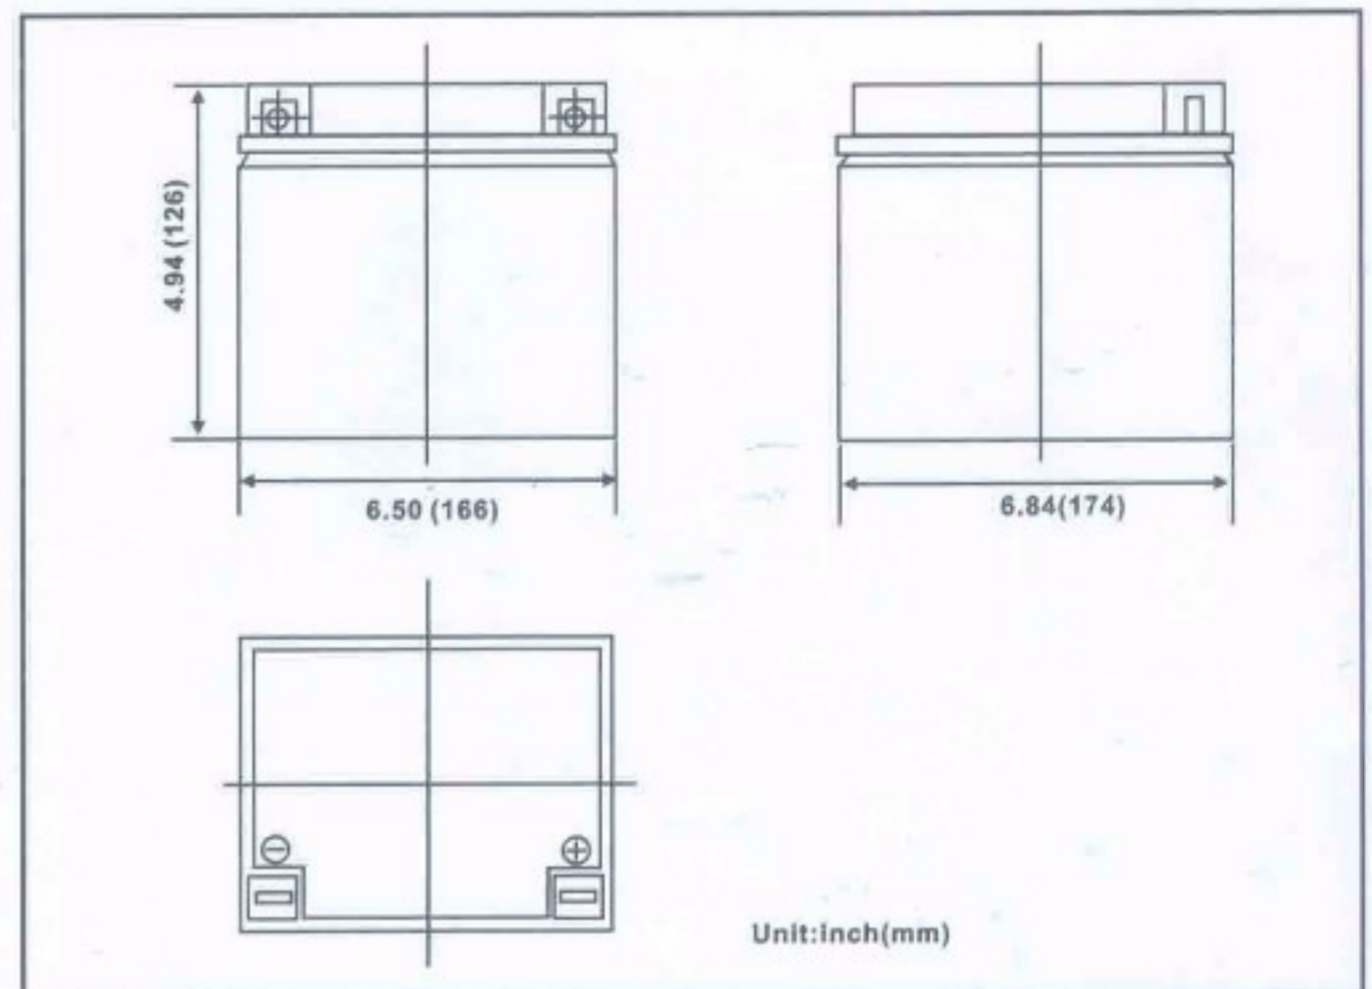



# 12M26

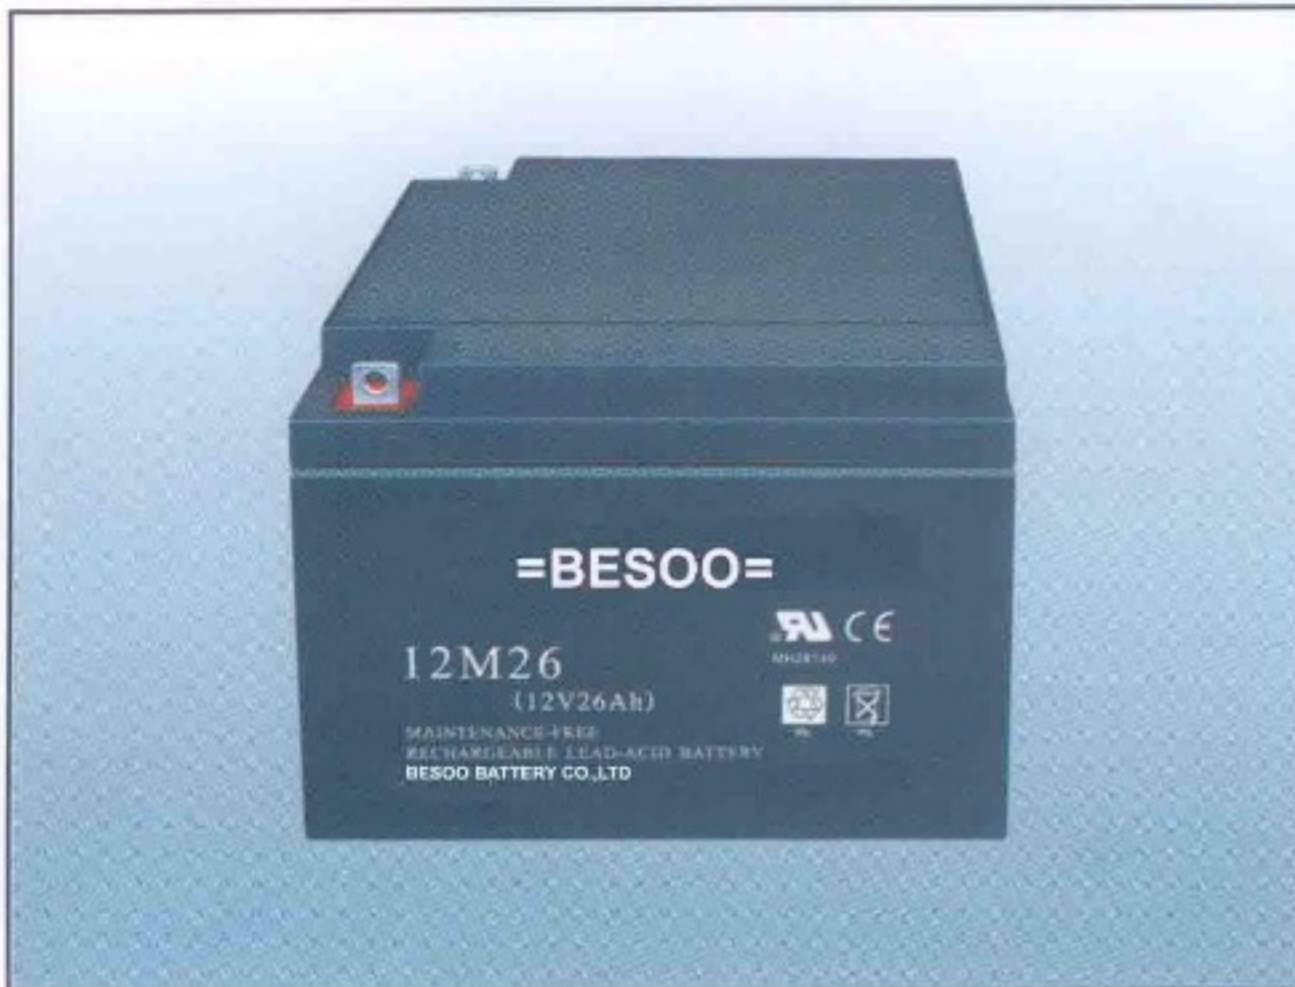

## SPECIFICATIONS

<b>Nominal Voltage</b>		<b>12V</b>		
<b>Nominal Capacity</b>		<b>26Ah</b>		
<b>Dimensions</b>	<b>Length</b>	6.84 inches (174mm)		<b>Weight</b> Approx 17.86lbs (8100g)
	<b>Width</b>	6.5 inches (166mm)		
	<b>Height</b>	4.94 inches (126mm)		<b>Terminals</b> F4(standard)
	<b>Total Height</b>	4.94 inches (126mm)		
<b>Capacity</b> 77°F(25°C)	20 hour rate(1300mA)	26 Ah	<b>Constant Voltage Charge</b>	<b>Cycle</b> Initial Charging Current less than 7.8A Voltage 14.5-14.9V at 77°F(25°C)Temp.coefficient -30mv/°C
	10 hour rate(2330mA)	23.3 Ah		
	5 hour rate(3880mA)	19.0 Ah		
	1 hour rate(16.1A)	16.1 Ah		
	15 minute rate(37.2A)	9.3 Ah		
<b>Capacity affected by Temperature</b>	104°F(40°C)	102%	<b>Standby</b> Initial Charging Current less than 7.8A Voltage 13.50-13.90V at 77°F(25°C)Temp.coefficient -20mv/°C	
	77°F(25°C)	100%		
	32°F(0°C)	85%		
	5°F(-15°C)	65%		
<b>Internal Resistance</b>	Full charged battery 77°F(25°C) < 16mΩ			

Discharge Characteristics @ 77°F(25°C)

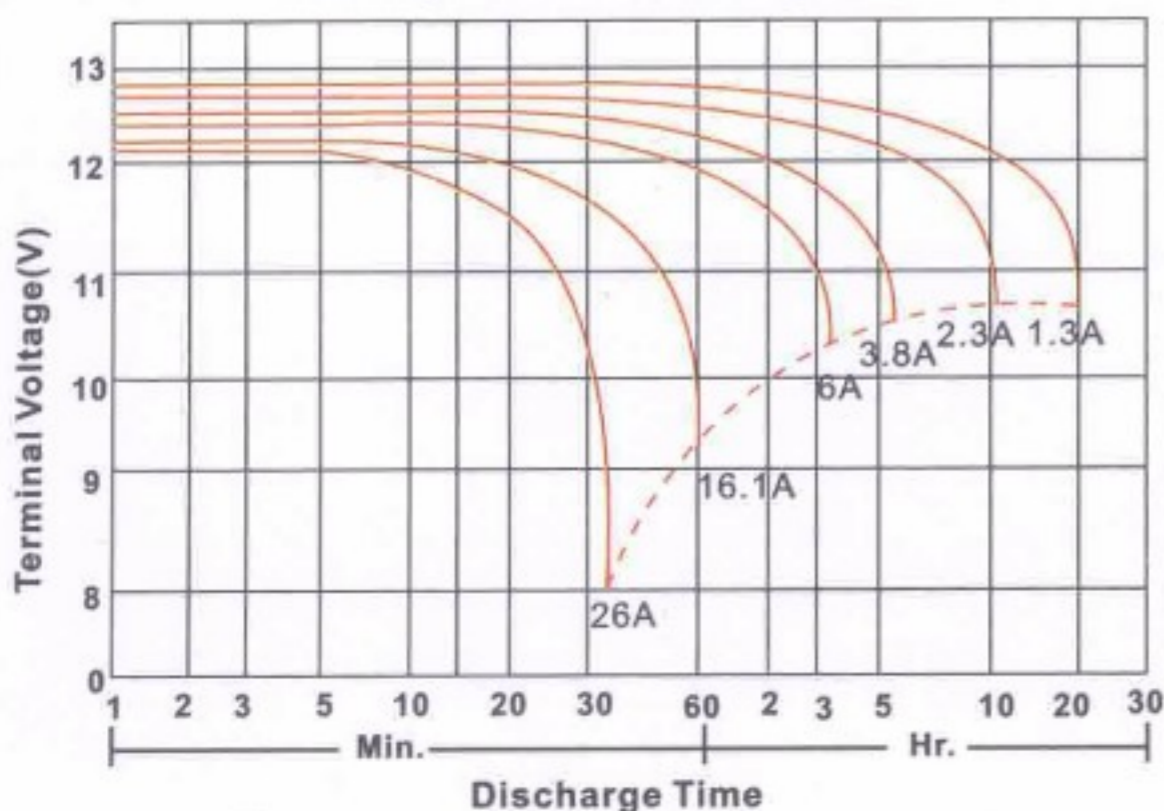

Discharge Time Vs. Discharge current

