


TECHNICAL DATA

I. PRODUCTS EXPLODED VIEW



II. PRODUCT SIZE

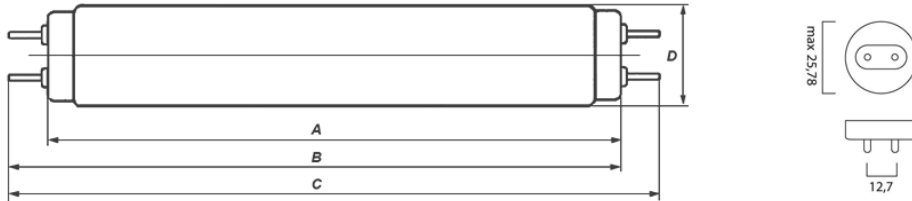

III. PARAMETERS TABLE

T8-10W

Type	Power	Color temp	Ra	Im	Base	Size (mm)					Use life(hours)	Packing Size (mm)
						A(max)	B(min)	B(max)	C(max)	D		
T8	10W	6500K	72	380	G13	331	369.2	371.6	378.7	26	5000	370*290*145
T8	10W	4000K	60	390	G13	331	369.2	371.6	378.7	26	5000	370*290*145
T8	10W	2700K	45	430	G13	331	369.2	371.6	378.7	26	5000	370*290*145

T8-15W

Type	Power	Color temp	Ra	Im	Base	Size (mm)					Use life(hours)	Packing Size (mm)
						A(max)	B(min)	B(max)	C(max)	D		
T8	15W	6500K	72	560	G13	437.4	442.1	444.5	451.6	26	7000	470*290*145
T8	15W	4000K	60	610	G13	437.4	442.1	444.5	451.6	26	7000	470*290*145
T8	15W	2700K	45	630	G13	437.4	442.1	444.5	451.6	26	7000	470*290*145

T8-18W

Type	Power	Color temp	Ra	Im	Base	Size (mm)					Use life(hours)	Packing Size (mm)
						A(max)	B(min)	B(max)	C(max)	D		
T8	18W	6500K	72	960	G13	589.8	594.5	596.9	604	26	7000	635*145*145
T8	18W	4000K	60	1110	G13	589.8	594.5	596.9	604	26	7000	635*145*145
T8	18W	2700K	45	1150	G13	589.8	594.5	596.9	604	26	7000	635*145*145

T8-20W

Type	Power	Color temp	Ra	Im	Base	Size (mm)					Use life(hours)	Size (mm)
						A(max)	B(min)	B(max)	C(max)	D		
T8	20W	6500K	72	1100	G13	589.8	594.5	596.9	604.0	26	8000	635*145*145
T8	20W	4000K	60	1200	G13	589.8	594.5	596.9	604.0	26	8000	635*145*145
T8	20W	2700K	45	1250	G13	589.8	594.5	596.9	604.0	26	8000	635*145*145

T8-30W

Type	Power	Color temp	Ra	Im	Base	Size (mm)					Use life(hours)	Packing
						A(max)	B(min)	B(max)	C(max)	D		Size (mm)
T8	30W	6500K	72	1720	G13	894.6	899.3	901.7	908.8	25	8000	935*145*145
T8	30W	4000K	60	2020	G13	894.6	899.3	901.7	908.8	25	8000	935*145*145
T8	30W	2700K	45	2100	G13	894.6	899.3	901.7	908.8	25	8000	935*145*145

T8-36W

Type	Power	Color temp	Ra	Im	Base	Size (mm)					Use life(hours)	Packing
						A(max)	B(min)	B(max)	C(max)	D		Size (mm)
T8	36W	6500K	72	2400	G13	1199	1204	1207	1214	26	8000	1235*145*145
T8	36W	4000K	60	2650	G13	1199	1204	1207	1214	26	8000	1235*145*145
T8	36W	2700K	45	2760	G13	1199	1204	1207	1214	26	8000	1235*145*145

T8-40W

Type	Power	Color temp	Ra	Im	Base	Size (mm)					Use life(hours)	Packing
						A(max)	B(min)	B(max)	C(max)	D		Size (mm)
T8	40W	6500K	72	2500	G13	1199	1204	1207	1214	26	8000	1235*145*145
T8	40W	4000K	60	2800	G13	1199	1204	1207	1214	26	8000	1235*145*145
T8	40W	2700K	45	2850	G13	1199	1204	1207	1214	26	8000	1235*145*145

OVERVIEW**USAGE**

Adopt highly active powder, low light decay and high effect. Daylight, cool white and warm white are made to

adjust the color temperature need in different environment. Advanced dusting tech can increase the light effect

and reduce light decay. Cathode protection rings in the two sides of the tube to protect the tube to be black.

Adopt the tri-spiral fuse to take along enough powder to make it long life. Widely used as lighting in family,

factory, shopping center and school.

APPLICATION

